


RoHS
Compliant

BOM				
ITEM	COMPONENT	MATERIAL	Q'TY	FINISHED
1	BODY-MALE	BRASS	1	GOLD PLATED
2	BODY-FEMALE	BRASS	1	GOLD PLATED
3	INSULATOR	TEFLON	2	NONE
4	CENTER CONTACT-FEMALE	BE. COPPER	1	GOLD PLATED
5	CENTER CONTACT-MALE	BRASS	1	GOLD PLATED
6	LABELS	--	1	--

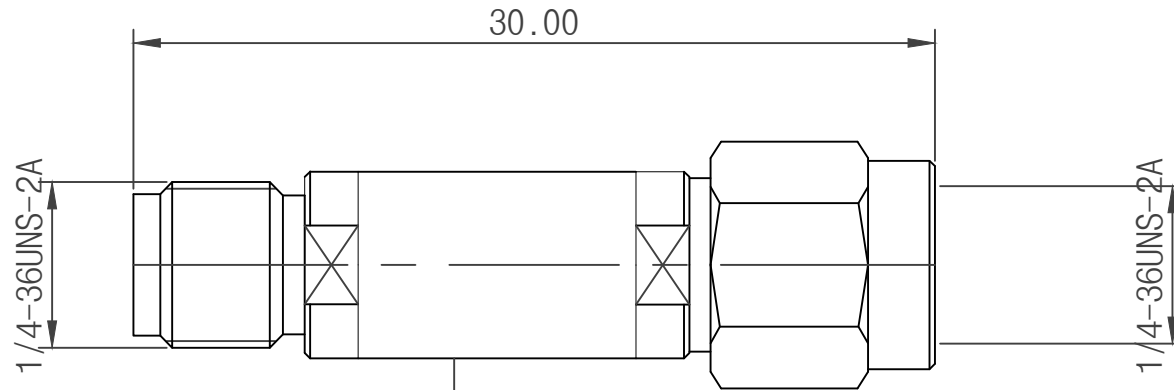

SMA ATTENUATOR
DC-20GHz 2W XXdB

ELECTRICAL

IMPEDANCE: 50 Ω
 FREQUENCY: DC 0-20 GHz
 VSWR: 1.35 MAXIMUM
 OPERATING TEMPERATURE(° C):-55° TO +125°
 PEAK POWER: 0.5KW (5 S PULSE WIDTH, 0.2% LOAD CYCLE)
 AVERAGIE POWER(WATTS): 2
 ATTENUATOR: 1dB,2dB,3dB,5dB,6dB,10dB,15dB,20dB,30dB,
 (1dB-10dB) ± 0.5dB, (15dB-30dB) ± 1dB

ITEM	Description	Revision	Mender

REMARKS:	REV:	A1	TITLE:		
	DESIGNED:	WYP	SMA FIXED ATTENUATOR 2W 1-30dB 20G 500HM		
	DRAWN:	WYP	ASSEMBLY DRAWING	SCALE:	FIT
	CHECKED:	XXXXX	DWG No: 8221-2W-20G-XX	SHEET SIZE:	A4
	APPROVAL:	XXXXX	DATE: 2016/08/12	UNITS:	mm
TOLERANCES:		3RD ANGLE		Super Yong (Guang Zhou) electronic Co.Ltd	
DIM. X.X=±0.5				www.super-conn.com	
X.XX=±0.25					